

Your contact data

Company + Address

Contact person

Telephone

Email

01. Application

- Protective bellow (dust or moisture protection)
- Compensator bellow
- Dosing bellow
- Valves and fittings
- Other applications:

02. Operating conditions

Steady-state temperature (°C):


Max. temperature (°C):

Internal pressure (bar):

External pressure (bar):

Frequency (strokes per min):

- Medium:
- inside
  - fluids
  - outside
  - with solids content
  - gases
  - incrusting

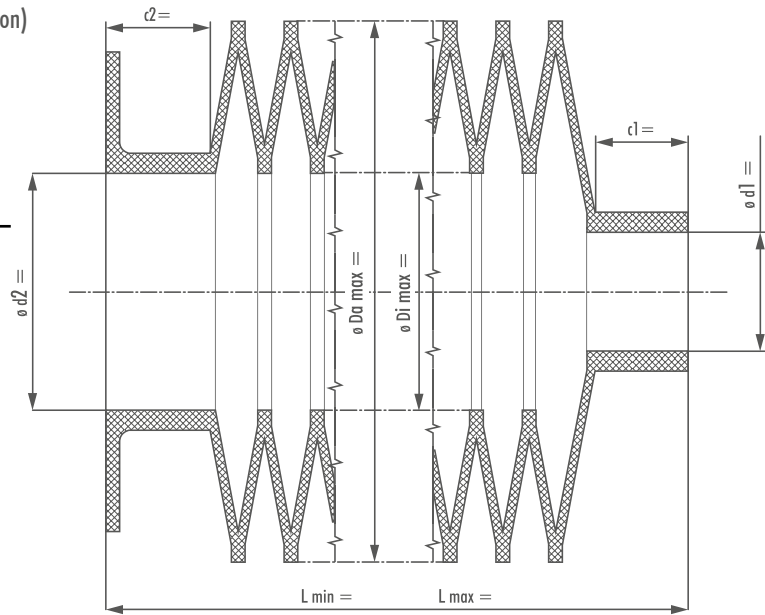

Please indicate the dimensions on the drawing if known.

03. Installation

- Horizontal
- Vertical
- Oblique

04. Connection type

- Flange 
- Cuff 
- Tri-clamp 
- Other

05. Stroke

Compressed length (mm):  $L_{\text{min}} =$

Installed length (mm):  $L_i =$

Expanded length (mm):  $L_{\text{max}} =$

Stroke =  $L_{\text{max}} - L_{\text{min}} =$

06. Folds

- Sharp folds 
- Round folds 
- Angular folds 

07. Material

- PTFE pure
- PTFE pure mod.
- PTFE conductive

08. Quantity

- Prototype:
- Spare part:
- Series: